

HBP4C-48-600-3.2-69

Solar DC Pump (Permanent Magnet)



Performance

MAX Head :

69m

MAX Water Flow/ hour :

3.2 m³/h



Technical Data

Pump Specifications	Centrifugal Pump 48V
Pump Outlet Dia.	25mm G 1"
Adapting Well Dia.	100 mm
Solar Pumping Controller Model	HBDC750
Controllor Power	750 W
Max. DC Input Voltage	100 V
Recommended MPPT Voltage	>48V
Controller Ambient Temperature	-20 ~ 60 °C
Pump Model	HBP4C-48-600-3.2-69
Motor Power	600W
Pump Enclosure Class	IP68
Ambient Water pH Range	6.5 - 8.0
Ambient Water Temperature	1 - 35 °C

Solar Pump Net Weight	16 kgs	Pump Impeller Material	POM
Solar Pump Gross Weight	17 kgs	Pump Body Material	AISI 304
Solar Pump Volume	0.03m ³	Controller Enclosure Material	Stainless Steel

Dimension, Weight and Material

Warranty

Controller	1.5 years
Pump	1 year

Standards

- EN 61000-6-2:2005
- EN 61000-6-4:2007+A1:2011
- EN 61000-3-2:2014
- EN 61000-3-3:2013

*All specifications and information are provided with good intent, products may be subject to change without notice.

Dimension, Weight and Material

Controller

Width = 250 mm
Height = 360 mm
Depth = 200 mm




Pump

Length = 850 mm
Diameter = 4"
Outlet= 1"



Performance Curve

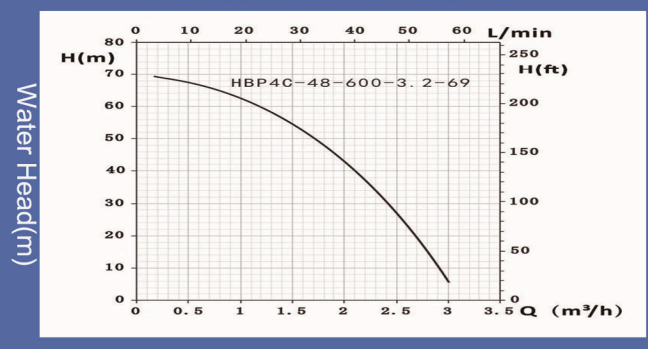

Water Flow(m³/hour)